



Driver: _____ Class: _____ ☐ Flat ☐ Banked Run Line: _____
Track: _____ Driving Style: Smooth ☐ Surface: Smooth ☐☐☐☐☐ Bumpy
Event: _____ Aggressive ☐ Traction: High ☐☐☐☐☐☐ Low

Tires

	Brand/Name	Compound	Insert
RF			
LF			
RR			
LR			

Cleaned With: _____


Traction Additive: _____

Notes: _____

Shocks - ☐ Small Bore ☐ 12mm Big Bore ☐ Bladder ☐ Emulsion

	Body Length	Shaft Length	Spring	Oil	Piston	Shock Length	Collar	Spring Cup
RF	S M L	S M L						Std. ____
LF	S M L	S M L						Std. ____
RR	S M L	S M L						Std. ____
LR	S M L	S M L						Std. ____

Measure the length of the exposed shaft with the shock fully extended.
Go to lighter oil or larger piston if tires are skidding over bumps in track.
Go to heavier oil or smaller piston if tires or car is bouncing.

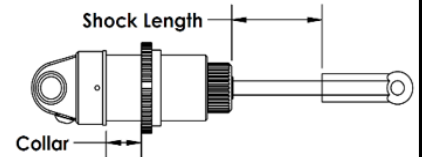

Ride Height

LF		RF	
LR		RR	

Offset

Front	☐ Standard ☐ High
Rear	☐ Standard ☐ High

Corner Weights


LF		RF	
LR		RR	

Rear %	
Left %	
Wedge %	

Notes: _____

Total Weight: _____ ☐ Measured without cage

Front Suspension

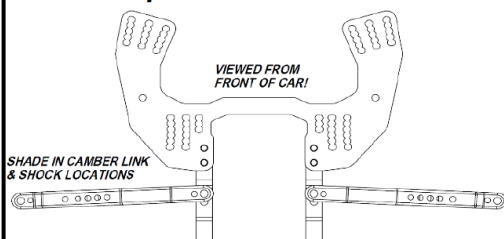


Right	Left	Right
____°	____°	____mm
☐ 0	☐ 0	☐ Inner
☐ -5 ☐ +5	☐ -5 ☐ +5	☐ Kingpin
☐ -10 ☐ +10	☐ -10 ☐ +10	
☐ Inline	☐ Inline	☐ None
☐ Trailing	☐ Trailing	☐ ____mm
☐ Inclined	☐ Inclined	
☐ Forward	☐ Forward	☐ Forward
☐ Middle	☐ Middle	☐ Middle
☐ Back	☐ Back	☐ Back
Inner ____mm	Inner ____mm	☐ High
Outer ____mm	Outer ____mm	☐ Low

Kick-Up	☐ 15° ☐ 30° ☐ 20° ☐ 35° ☐ 25° ☐ ____°
Toe	☐ In ____° ☐ Out ____°
Sway Bar	☐ None
Servo Position	☐ Front ☐ Bellcranks
Hex Width	____mm
Outer Link Location	☐ Inner ☐ Kingpin
Outer Ball Stud Washers	☐ None ☐ ____mm
Caster Block Spacing	☐ Forward ☐ Middle ☐ Back
Inner Hinge Pin Height	☐ High ☐ Low

Rear Suspension

VIEWED FROM REAR OF CAR!		SHADE IN SHOCK LOCATIONS	
Left	Right	Left	Right
____°	____°	Inner ____	Inner ____
☐ 0	☐ 0	Outer ____	Outer ____
☐ 1 ☐ 3	☐ 1 ☐ 3	☐ Inner	☐ Inner
☐ 2 ☐ 4	☐ 2 ☐ 4	☐ Outer	☐ Outer
☐ None	☐ None	☐ None	☐ None
☐ ____mm	☐ ____mm	☐ ____mm	☐ ____mm
☐ ____°	☐ ____°	☐ Inner	☐ Inner
☐ Brass	☐ Brass	☐ Outer	☐ Outer
☐ Brass	☐ Brass	☐ Forward	☐ Forward
☐ Delrin	☐ Delrin	☐ Back	☐ Back
☐ Plastic	☐ Plastic	☐ Forward	☐ Forward
☐ High	☐ High	☐ Back	☐ Back
☐ Middle	☐ Middle	☐ ____mm	☐ ____mm
☐ Low	☐ Low		

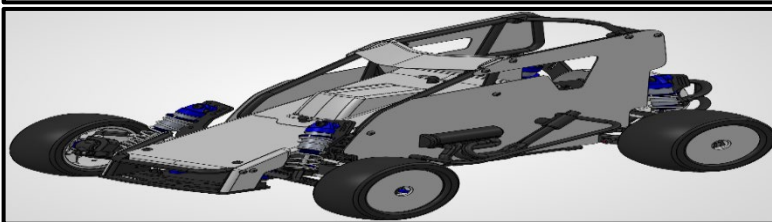

Electronics/Gearing

Servo: _____ Drag Brake: _____
Pinion: _____ Battery: _____
Spur: _____ Battery Position: F ☐☐☐☐☐ R

Notes: _____

