

Driver: Max FlurerClass: Midget☒ Flat ☐ Banked Run Line: _____

Track: _____

Driving Style: Smooth ☐Surface: Smooth ☐☐☒☐ BumpyEvent: MotoramaAggressive ☐Traction: High ☐☐☒☐ Low**Tires**

	Brand/Name	Compound	Insert
RF	QS		Stella
LF	"		"
RR	"		"
LR	"		"

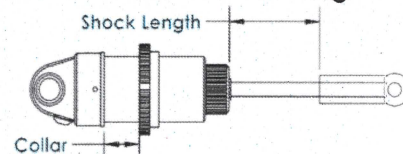
Cleaned With: _____

Traction Additive: _____

Notes: Low Pin made into SlicksShocks - ☐ Small Bore ☒ 12mm Big Bore ☒ Bladder ☐ Emulsion

	Body		Shaft		Shock		Spring	
	Length	Length	Spring	Oil	Piston	Length	Collar	Cup
RF	S M L	S M L	Yellow	30	1.7	22		Std
LF	S M L	S M L	Yellow	30	1.7	22		Std
RR	S M L	S M L	Red	30	1.7	22		Std
LR	S M L	S M L	Red	30	1.7	22		Std

Measure the length of the exposed shaft with the shock fully extended.
Go to lighter oil or larger piston if tires are skidding over bumps in track.
Go to heavier oil or smaller piston if tires or car is bouncing.

**Ride Height**

LF	15	RF	16
LR	15	RR	15

Offset

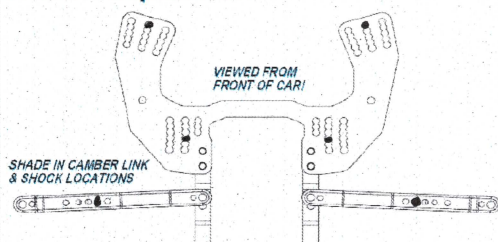
Front	☒ Standard ☐ High
Rear	☒ Standard ☐ High

Corner Weights

LF	11.69	RF	11.08
LR	15.91	RR	15.58

Rear %	58
Left %	51
Wedge %	50

Notes: _____

Total Weight: 54.27☐ Measured without wing**Front Suspension**

Kick-Up

☐ 15° ☒ 30°
☐ 20° ☐ 35°
☐ 25° ☐ _____

Toe

☐ In ☐ _____
☒ Out ☐ 1°

Sway Bar

☒ None ☐ _____**Right**

Camber

☐ 0°
☐ -5 ☐ +5
☐ -10 ☐ +10

Caster

Left

Camber

☐ 0°
☐ -5 ☐ +5
☐ -10 ☐ +10

Caster

Right

Camber

☐ Inline
☒ Trailing
☐ Inclined

Spindle

☐ Inline
☒ Trailing
☐ Inclined

Spindle

☐ Forward
☒ Middle
☐ Back

Spindle Ball Stud

☐ Forward
☒ Middle
☐ Back

Spindle

Inner 2 mm
Outer 0 mm

Bump Steer Washers

Inner 0 mm
Outer 0 mm☒ High
☐ Low

Hex Width

Outer Link Location

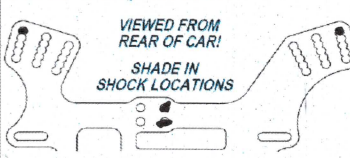
Outer Ball Stud Washers

Caster Block Spacing

Inner Hinge Pin Height

Left

Camber

☐ 0°
☐ 1 ☐ 3
☐ 2 ☐ 4☐ None
☒ 1 mm☐ 3°
☐ Brass☐ Brass
☒ Delrin
☐ Plastic☐ High
☒ Middle
☐ Low**Rear Suspension**

Gear Diff Oil- _____

Outdrives / Differential

☒ Steel
☐ Alum
☐ Gear

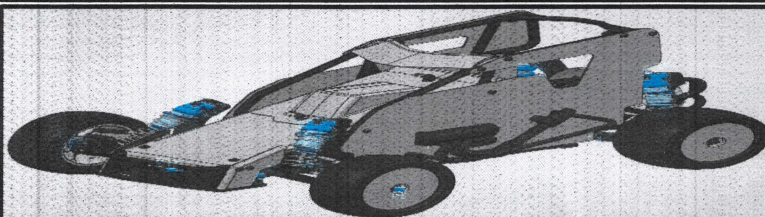
Slipper

☐ Yes
☒ No**Left**

+1°

☐ 0
☐ 1 ☐ 3
☐ 2 ☐ 4☐ None
☒ 1 mm☐ 3°
☐ Brass☐ Brass
☒ Delrin
☐ Plastic☐ High
☒ Middle
☐ Low**Right**

-2°

☐ 0
☐ 1 ☐ 3
☐ 2 ☐ 4☐ None
☒ 1 mm☐ 3°
☐ Brass☐ Brass
☒ Delrin
☐ Plastic☐ High
☒ Middle
☐ Low**Left**Inner 4Outer 1☒ Inner
☐ Outer☒ None
☐ _____ mm☒ Inner
☐ Outer☒ Forward
☐ Back☒ Forward
☐ Back**Right**Inner 2Outer 1☒ Inner
☐ Outer☒ None
☐ _____ mm☒ Inner
☐ Outer☒ Forward
☐ Back☒ Standard
☐ LaydownHex Width 6 mm**Electronics/Gearing**Servo: Exalt HB110 Drag Brake: 0Pinion: 36Battery: Exalt 6400Spur: 72Battery Position: ☐☐☐☒☐ RNotes: Bell cranks/servo Forward